


This handout is intended only as a guide and is based in part on the 2015 Minnesota State Building Code, City of Proctor ordinances, and good building practice. While every attempt has been made to insure the correctness of this handout, no guarantees are made to its accuracy or completeness. Responsibility for compliance with applicable codes and ordinances falls on the owner or contractor. For specific questions regarding code requirements, refer to the applicable codes or contact your local Building Safety Division.



Permanent label required on each light

LABEL EXAMPLES




TUF-FLEX® FT 1/4' -U B TEMPERED SAFETY GLASS ANSI Z 97.1 - 1975 SGCC 352 16 CFR 12014 II SGCC 847 LOF ANSI and Tempered Codes


PPG HERCULITE K TEMPERED SAFETY GLASS 16CFR201 CII ANSI Z-97.1-1975 I/8" O SGCC-295 ISGH 367II PPG Glass. ANSI and Safety Glazing codes.







FORD TEMPERED SAFETY GLASS ANSI 297.1 - 1975 SGCC-342/729 16 CFR 1201. II Ford Glass ANSI and Tempered Codes.

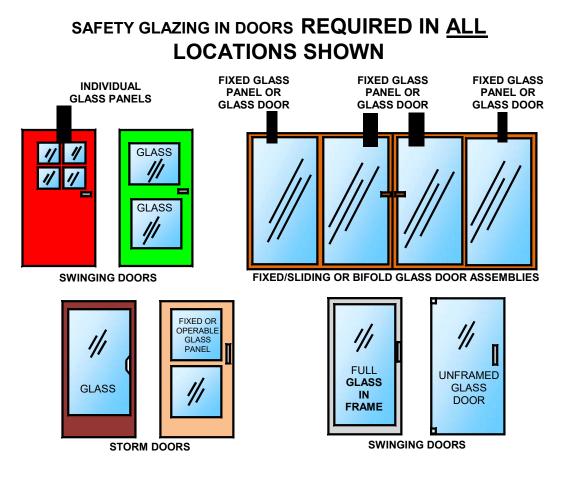

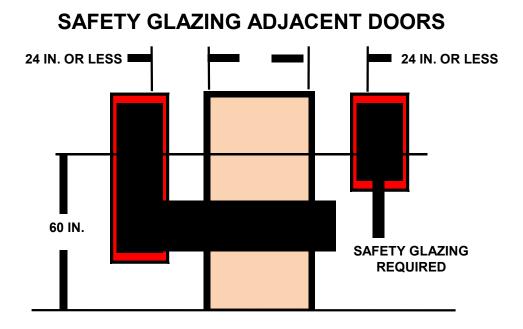


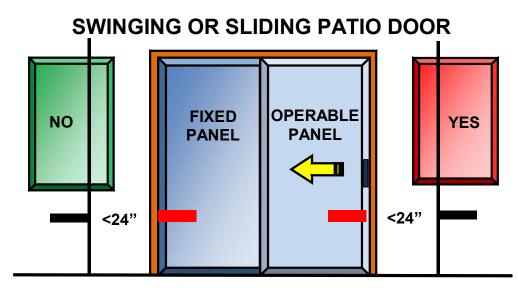

SAFETY GLAZING REQUIRED IN <u>WINDOW</u> ADJACENT PATIO DOOR?

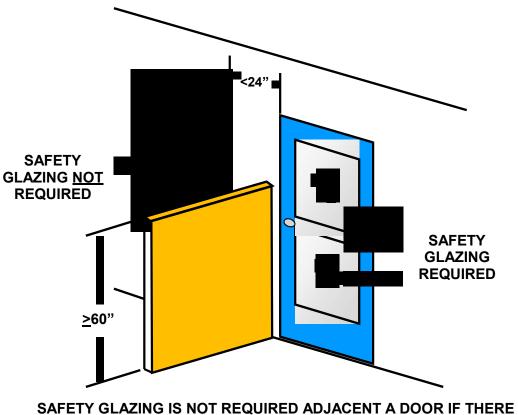


IS A WALL OR PANEL AT LEAST 60 INCHES IN HEIGHT SEPARATING THE DOOR FROM THE GLAZING

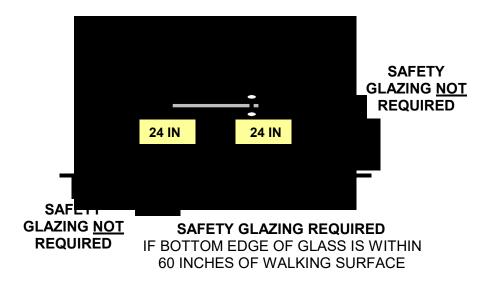


SAFETY GLAZING IN WINDOWS

SAFETY GLAZING REQUIRED IF ALL FOUR CRITERIA EXIST

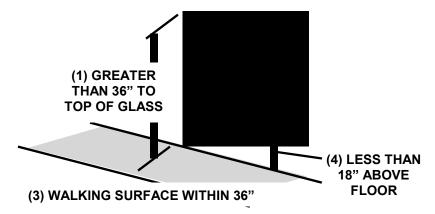

IF THE WINDOW HAS A BAR OR RAIL MOUNTED 34-38" ABOVE THE PLANE OF THE WALKING SURFACE, SAFETY GLAZING IS NOT REQUIRED. THE BAR OR RAIL MUST BE AT LEAST 1 1/2" THICK AND NOT CONTACT THE GLASS.

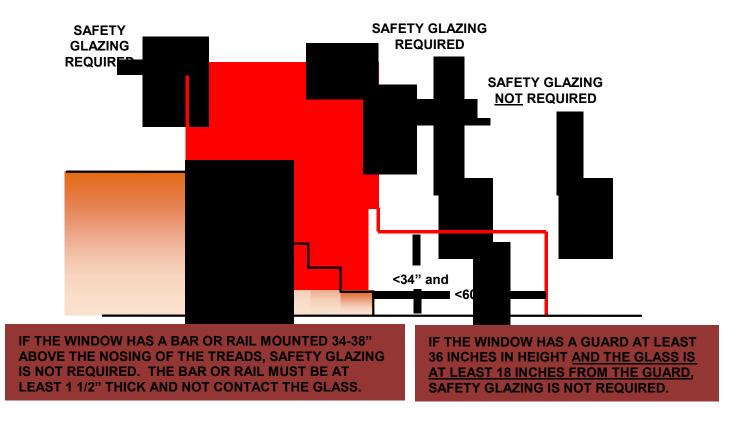

SAFETY GLAZING FOR STAIRS AND LANDINGS

SAFETY GLAZING REQUIRED ADJACENT SWIMMING POOLS

